

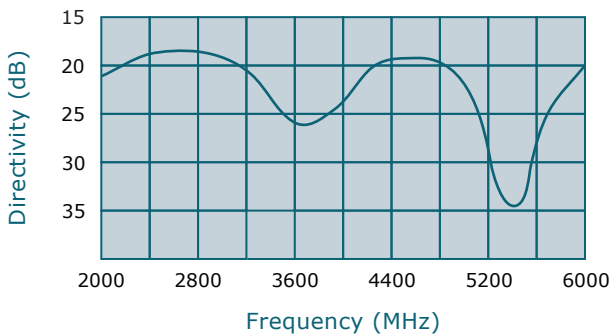
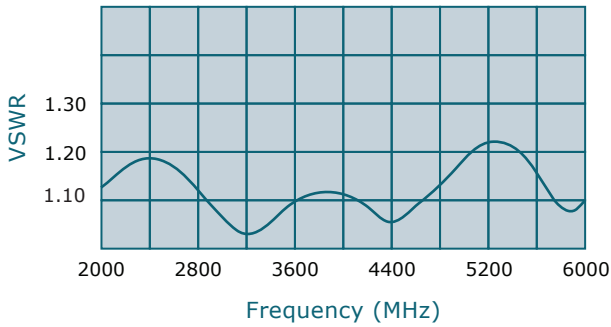


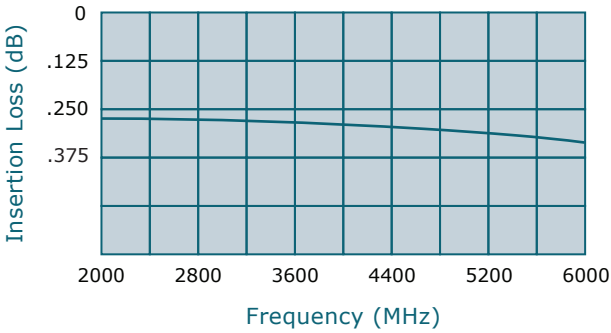

WERLATONE

SINCE 1965

Werlatone, Inc.
2095 Route 22
PO Box 47
Brewster, NY 10509
845.279.6187
FAX.279.7404
www.werlatone.com

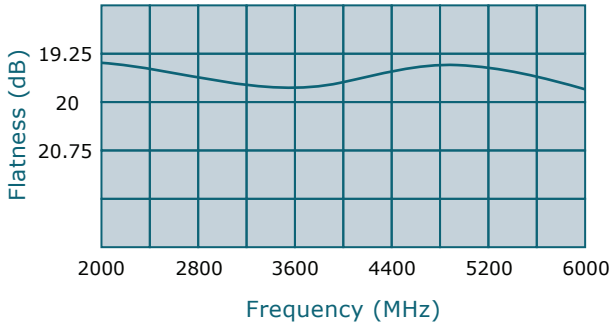

20 dB Bi-Directional Coupler Model C7776

Frequency: 2000-6000 MHz

Power: 50 W CW

Insertion Loss: 0.4 dB Max.

VSWR: 1.35:1 Max.

Flatness: +/- 0.75 dB Max.

Directivity: 15 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

Model	Connectors	Coupled Ports
C7776-102	Mainline SMA	SMA

